


FEATURES

- RF series relief valve is designed on the theory of differential pressure created by flow across the orifice of the balance piston. This differential pressure acts to open the piston against the spring, permitting enough fluid vented to tank at the set pressure.
- Piston moves smoothly, and controlled by pilot pressure, provides stable pressure control and good repeatability.
- Special internal passage design keeps flow noise to minimum.

Remarks: NPT ports for RF-T series can be made by special order

SPECIFICATIONS


SYMBOL



MODEL	MAX. PRESSURE KGF/CM ² (PSI)	PRESSURE ADJ. RANGE KGF/CM ² (PSI)	MAX. FLOW LPM(GPM)	MOUNTED BOLD(FOR G TYPE) METER(INCH)
RF-*04	250 (3550)	1:7-70(100-1000)	100 (26.4)	M12x70L(1/2"-2 3/4")2PCS M12x90L(1/2"-3 1/2") 2PCS
RF-*06		2:35-140(500-1000)	200 (52.8)	M16x60L(5/8"-2 1/4") 2PCS M16x80L(5/8"-3 1/4") 2PCS
RF-*10		3:70-250(1000-3550)	400 (105.6)	M20x70L(3/4"-2 3/4") 2PCS M20x90L(3/4"-3 1/2") 2PCS

HOW TO ORDER

RF - G06 - 3 - 30 - N

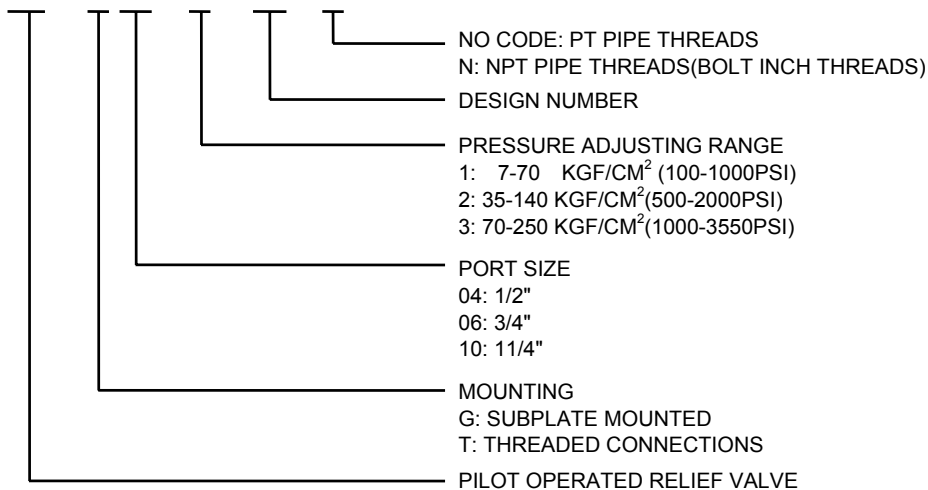

PRESSURE CONTROLS

PILOT OPERATED RELIEF VALVE


PERFORMANCE CURVE

TEST FLUID VISCOSITY : 35 cSt (175 SSU)

TEST TEMPERATURE : 50⁰ C (122⁰ F)


NOMINAL OVERRIDE

RF-G04, RF-T04

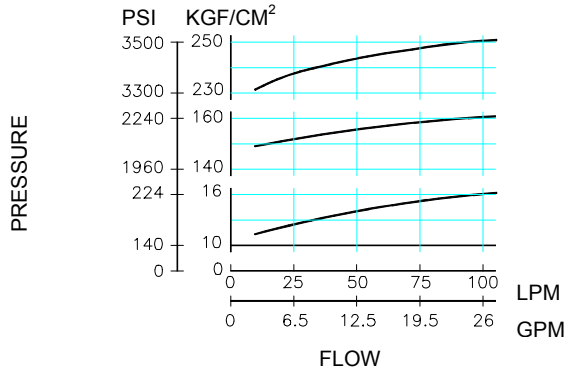


Min. Adj. PRESSURE


RF-G04, RF-T04

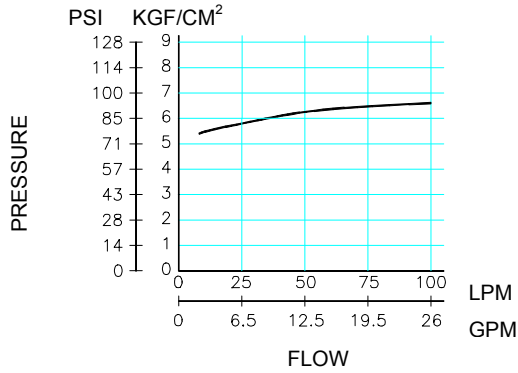


RF-G06, RF-T06

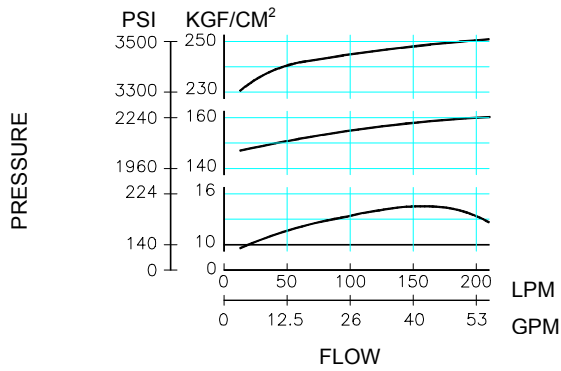


RF-G06, RF-T06

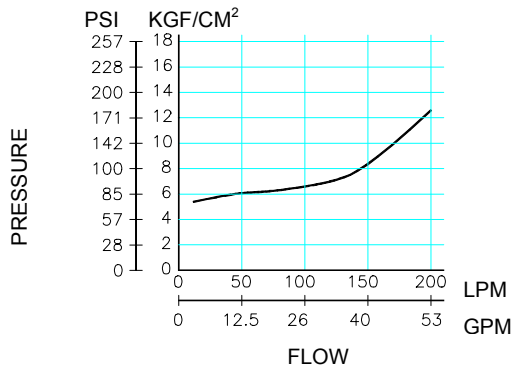

RF-G10, RF-T10

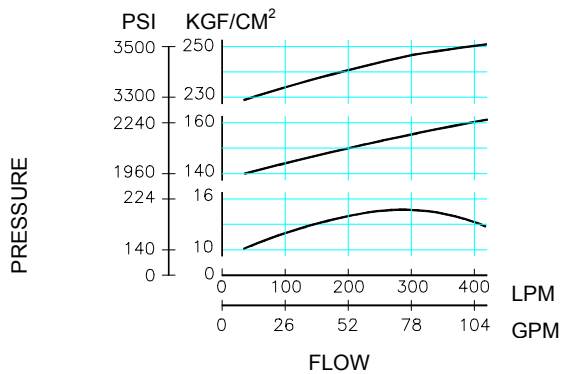

RF-G10, RF-T10


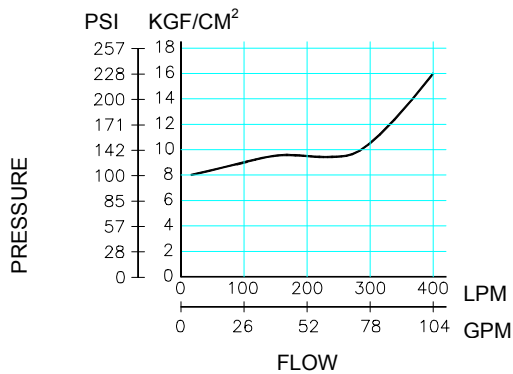


INSTALLATION DIMENSIONS

UNIT : mm(inch)



RF-G04

RF-G04 : ISO 6264-AR-06-2-A
WEIGHT 5.5kgs(12.1lbs)

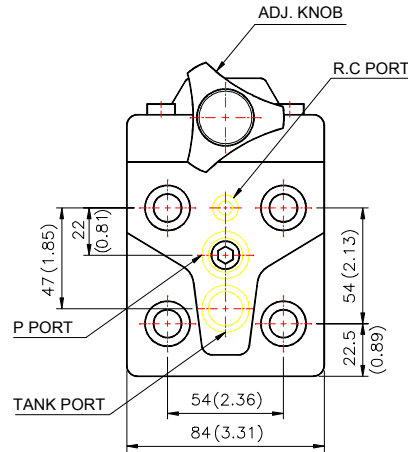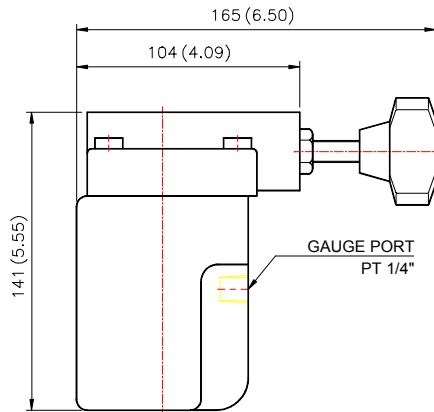

RF-G06/10

06 : ISO 6264-AS-08-2-A
10 : ISO 6264-AT-10-2-A

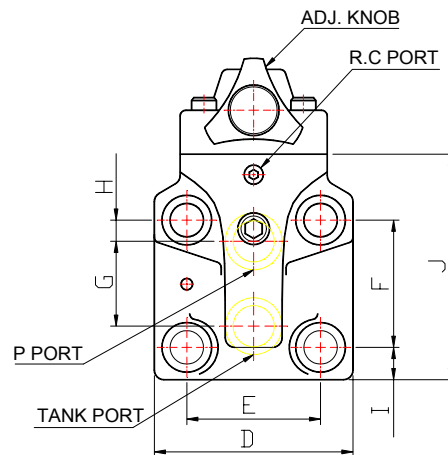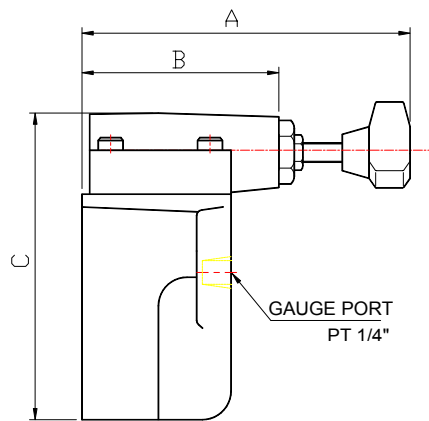



MODEL	A	B	C	D	E	F	G	H	I	J	WEIGHT	
											KGS	LBS
RF-G06	175 (6.89)	104 (4.09)	160 (6.30)	104 (4.09)	70 (2.76)	66.6 (2.62)	44.1 (1.74)	11.1 (1.74)	19.5 (.076)	122 (4.80)	6.7	14.7
RF-G10	184 (7.24)	120 (4.72)	195 (7.68)	125 (4.92)	82 (3.23)	88.9 (3.50)	63.6 (2.50)	12.7 (0.50)	18.5 (0.73)	150 (5.91)	10.1	22.1

PRESSURE CONTROLS
 PILOT OPERATED RELIEF VALVE

INSTALLATION DIMENSIONS

UNIT : mm(inch)

RF-T0*

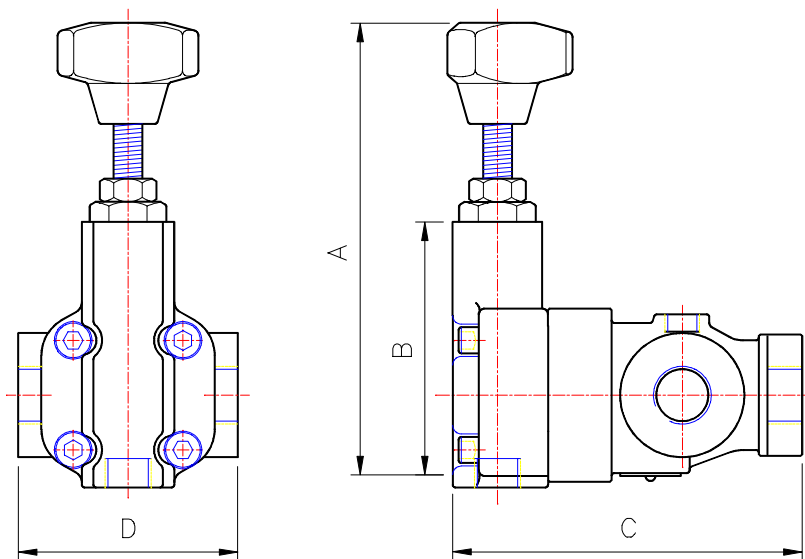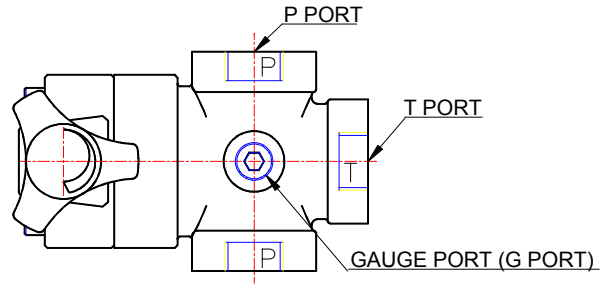


MODEL	A	B	C	D	P PORT	T PORT	G PORT	WEIGHT	
								KGS	LBS
RF-T04 SERIES	MAX. 142 (5.59)	92 (2.02)	111 (4.37)	84.5 (3.33)	PT 1/2"	PT 1/2"	PT 1/4"	3.4	7.5
RF-T06 SERIES	MAX. 148 (5.83)	102 (4.02)	140 (5.51)	103 (4.05)	PT 3/4"	PT 3/4"	PT 1/4"	5.3	11.7
RF-T10 SERIES	151 MAX. (5.94)	120 (4.72)	183 (7.20)	120 (4.72)	PT 1 1/4"	PT 1 1/4"	PT 1 1/4"	8.5	18.7

INSTALLATION DIMENSIONS

UNIT : mm(inch)

MF-**

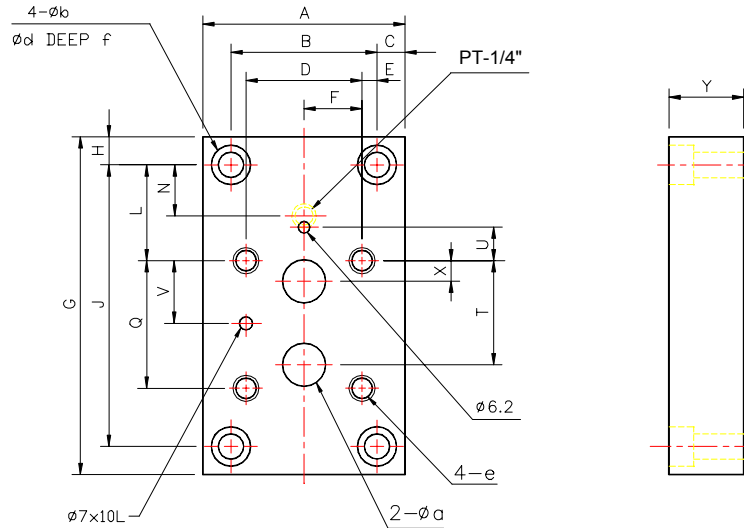

MODEL	A	B	C	D	E	F	G	H
MF-04	86 (3.39)	60 (2.36)	13 (0.51)	53.8 (2.12)	3.1 (0.12)	26.9 (1.06)	149 (5.87)	13 (0.51)
MF-06	108 (4.25)	78 (3.07)	15 (0.59)	70 (2.76)	4 (0.16)	35 (1.38)	180 (7.09)	15 (0.59)
MF-10	126 (4.96)	94 (3.70)	16 (0.63)	82.6 (3.25)	5.7 (0.22)	41.3 (1.63)	227 (8.94)	16 (0.63)

MODEL	J	L	N	Q	T	U	V	X
MF-04	123 (4.84)	32 (1.26)	26 (1.02)	53.8 (2.12)	47.5 (1.87)	0 (0.00)	22.1 (0.87)	22.1 (0.87)
MF-06	150 (5.91)	51 (2.01)	27.2 (1.07)	66.7 (2.63)	55.6 (2.19)	23.8 (0.94)	33.4 (1.31)	11.1 (0.43)
MF-10	195 (7.68)	62 (2.44)	30.2 (1.19)	88.9 (3.5)	76.2 (3.00)	31.8 (1.25)	44.5 (5.44)	12.7 (0.50)

MODEL	Y	a	b	d	e	f
MF-04	32 (1.26)	14.5 (0.57)	11 (0.43)	17.5 (0.69)	M12x20L 1/2-13UNCx20L	12 (0.47)
MF-06	40 (1.57)	23 (0.91)	13.5 (0.53)	21 (0.83)	M16x25L 5/8-11UNCx25L	12 (0.47)
MF-10	50 (1.97)	28 (1.10)	17.5 (0.69)	26 (1.02)	M20x28L 3/4-10UNCx28L	17 (0.67)

SUBPLATE

HOW TO ORDER

MF - 04 - 04 - N

