



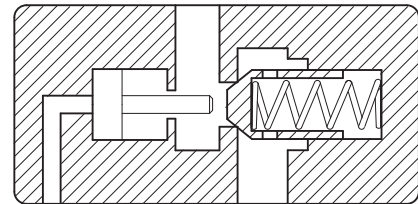

PILOT CONTROLLED CHECK VALVE
PC(D)V SERIES

■ Symbols



■ HOW TO ORDER

PCDV	-G	03	-05	-ET	-20	-N
Series	Mounting Style	Nominal Size	Cracking Pressure	Option ET	Design Code	Pipe Threads
PCV: Pilot Controlled Check Valve PCDV: Decompression Type Pilot Controlled Check Valve	G: Subplate Mounted T: Threaded Connection	03: 10mm 06: 20mm 10: 32mm	05: 0.35bar 50: 3.5bar	E: External Piloted Internal Drain ET: External Piloted Drain	20	N: NPT Pipe Threads No Code: PT Pipe Threads

Note: This product must use external control.

■ SPECIFICATIONS

Model No.	Rated Flow (L/min)	Max. Operated Pressure (bar)	Cracking Pressure (bar)
PCV/PCDV-※03	40	210	05: 0.35
PCV/PCDV-※06	125		50: 3.5
PCV/PCDV-※10	250		