




MODULAR SOLENOID CONTROLLED REDUCING VALVE
MSPR SERIES

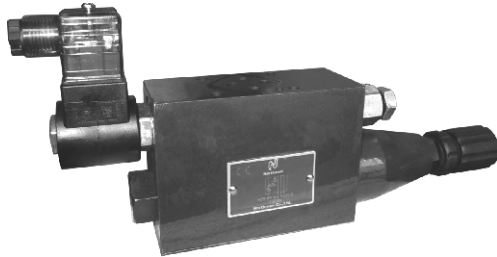

■ SPECIFICATIONS

Nominal Size	Max. Operated Pressure (bar)	Rated Flow (L/min)
02	250	20
03		45

■ HOW TO ORDER

MSPR	-03	P	-K	-1	-0	-D24	-10
Series	Nominal Size	Function Controlled Port	Adjustment Model	High Pressure Adj. Range(bar)	Low Pressure Adj. Range(bar)	Coil Voltage	Design Code
Modular Solenoid Controlled Reducing Valve	02: 6mm 03: 10mm	P: P Port	No Code: Without Knob K: With Plastic Knob	0: 1.5-35 1: 8-70 2: 35-140 3: 70-210	0: 1.5-35 1: 7-70 2: 18-140 3: 18-210	D12: DC12V D25: DC24V A115: AC115V A230: AC230V	10

■ SYMBOL

