





HOW TO ORDER

M06 - 06 - S - 1

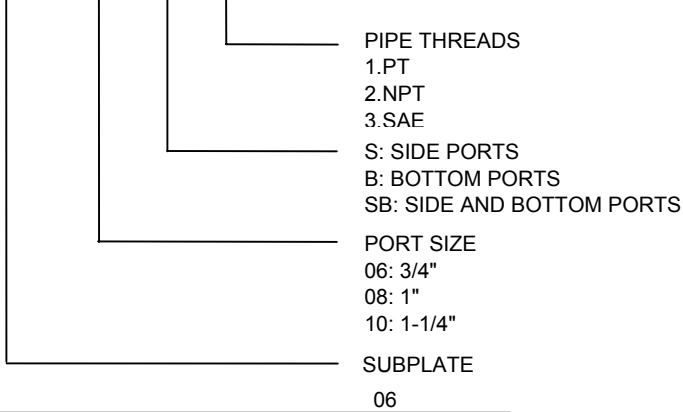

INSTALLATION DIMENSIONS

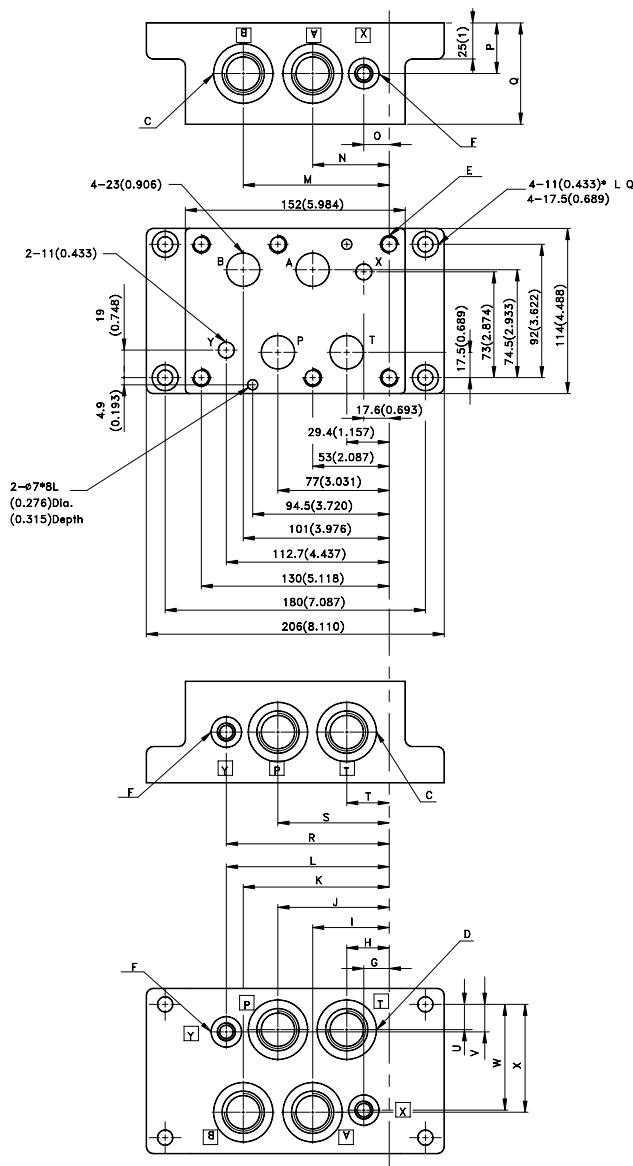

SUBPLATE
M06 SERIES

MODEL		PORT SIZE & INSTALLATION DIMENSIONS								
		C		D		E		F		
M06-06	- S	-1	4-3/4"PT		-		6-M12x1.75P		2-1/4" PT	
		-2	4-3/4"NPT		-		6-1/2-13UNC-2B		2-1/4" NPT	
		-3	4-3/4"SAE-2B		-		6-1/2-13UNC-2B		2-1/4"SAE-2B	
	- B	-1	-		4-3/4"PT		6-M12x1.75P		2-1/4" PT	
		-2	-		4-3/4"NPT		6-1/2-13UNC-2B		2-1/4"NPT	
		-3	-		4-3/4"SAE-2B		6-1/2-13UNC-2B		2-1/4"SAE-2B	
	- SB	-1	4-3/4"PT		4-3/4"PT		6-M12x1.75P		4-1/4" PT	
		-2	4-3/4"NPT		4-3/4"NPT		6-1/2-13UNC-2B		4-1/4" NPT	
		-3	4-3/4"SAE-2B		4-3/4"SAE-2B		6-1/2-13UNC-2B		4-1/4"SAE-2B	

MODEL		INSTALLATION DIMENSIONS																	
		G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X
M06-06	- S	-	-	-	-	-	-	101 (3.976)	53 (2.087)	17.6 (0.693)	35 (1.378)	70 (2.756)	112.7 (4.437)	77 (3.031)	29.4 (1.157)	-	-	-	-
	- B	17.6 (0.693)	29.4 (1.157)	53 (2.087)	77 (3.031)	101 (3.976)	112.7 (4.437)	-	-	-	-	-	-	-	-	17.5 (0.689)	19 (0.748)	73 (2.874)	74.5 (2.933)
	- SB	17.6 (0.693)	29.4 (1.157)	53 (2.087)	77 (3.031)	101 (3.976)	112.7 (4.437)	101 (3.976)	53 (2.087)	17.6 (0.693)	35 (1.378)	70 (2.756)	112.7 (4.437)	77 (3.031)	29.4 (1.157)	17.5 (0.689)	19 (0.748)	73 (2.874)	74.5 (2.933)

MODEL		PORT SIZE & INSTALLATION DIMENSIONS								
		C		D		E		F		
M06-06	- S	-1	4-1" PT		-		6-M12x1.75P		2-1/4" PT	
		-2	4-1" NPT		-		6-1/2-13UNC-2B		2-1/4" NPT	
		-3	4-1"SAE-2B		-		6-1/2-13UNC-2B		2-1/4"SAE-2B	
	- B	-1	-		4-1" PT		6-M12x1.75P		2-1/4" PT	
		-2	-		4-1" NPT		6-1/2-13UNC-2B		2-1/4" NPT	
		-3	-		4-1"SAE-2B		6-1/2-13UNC-2B		2-1/4"SAE-2B	
	- SB	-1	4-1" PT		4-1" PT		6-M12x1.75P		4-1/4" PT	
		-2	4-1" NPT		4-1" NPT		6-1/2-13UNC-2B		4-1/4" NPT	
		-3	4-1"SAE-2B		4-1"SAE-2B		6-1/2-13UNC-2B		4-1/4"SAE-2B	

MODEL		INSTALLATION DIMENSIONS																	
		G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X
M06-06	- S	-	-	-	-	-	-	106 (4.173)	53 (2.087)	17.6 (0.693)	35 (1.378)	70 (2.756)	112.7 (4.437)	77 (3.031)	24.4 (0.961)	-	-	-	-
	- B	17.6 (0.693)	24.4 (0.961)	53 (2.087)	77 (3.031)	101 (3.976)	112.7 (4.437)	-	-	-	-	-	-	-	-	17.5 (0.689)	19 (0.748)	73 (2.874)	74.5 (2.933)
	- SB	17.6 (0.693)	24.4 (0.961)	53 (2.087)	77 (3.031)	101 (3.976)	112.7 (4.437)	106 (4.173)	53 (2.087)	6 (0.693)	35 (1.378)	70 (2.756)	7 (4.437)	77 (3.031)	4 (0.961)	17.5 (0.689)	19 (0.748)	73 (2.874)	74.5 (2.933)

MODEL		PORT SIZE & INSTALLATION DIMENSIONS								
		C		D		E		F		
M06-06	- S	-1	4 -11/4" PT		-		6-M12x1.75P		2-1/4" PT	
		-2	4 -11/4" NPT		-		6-1/2-13UNC-2B		2-1/4" NPT	
		-3	4 -11/4" SAE-2B		-		6-1/2-13UNC-2B		2-1/4"SAE-2B	
	- B	-1	-		4 -11/4" PT		6-M12x1.75P		2-1/4" PT	
		-2	-		4 -11/4" NPT		6-1/2-13UNC-2B		2-1/4" NPT	
		-3	-		4 -11/4" SAE-2B		6-1/2-13UNC-2B		2-1/4"SAE-2B	
	- SB	-1	4 -11/4" PT		4 -11/4" PT		6-M12x1.75P		4-1/4" PT	
		-2	4 -11/4" NPT		4 -11/4" NPT		6-1/2-13UNC-2B		4-1/4" NPT	
		-3	4 -11/4" SAE-2B		4 -11/4" SAE-2B		6-1/2-13UNC-2B		4-1/4"SAE-2B	

MODEL		INSTALLATION DIMENSIONS																	
		G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X
M06-06	- S	-	-	-	-	-	-	106 (4.173)	48 (1.890)	85 (0.335)	45 (1.772)	90 (3.543)	121.5 (4.783)	82 (3.228)	24.4 (0.961)	-	-	-	-
	- B	85 (0.335)	24.4 (0.961)	48 (1.890)	82 (3.228)	106 (4.173)	121.5 (4.783)	-	-	-	-	-	-	-	-	17.5 (0.689)	19 (0.748)	73 (2.874)	74.5 (2.933)
	- SB	85 (0.335)	24.4 (0.961)	48 (1.890)	82 (3.228)	106 (4.173)	121.5 (4.783)	106 (4.173)	48 (1.890)	85 (0.335)	45 (1.772)	90 (3.543)	121.5 (4.783)	82 (3.228)	24.4 (0.961)	17.5 (0.689)	19 (0.748)	73 (2.874)	74.5 (2.933)

REMARK: Various port sizes/Pipe threads are available upon request.

